

Diesel Generator Set:C250

Standard Features	
MODEL	C250
Standby Power(50Hz)	220KW/275KVA
Prime Power(50Hz)	200KW/250KVA
Engine	PERKINS 1206A-E70TAG3
Alternator	LEROYSONER TAL-A46-D

- Standard control panel, Including controller, Operation lighting, Emergency stop button, Buzzer
- Main line circuit breaker
- Two 12V free maintenance battery, battery charger, Battery Ract and Battery Switch
- Industrial silencer, Ripple Flex exhaust pipe, Flange
- Fork lift position and lifting position
- With-8 hours Base Fuel Tank; Fuel Tank Capacity: 480L
- Radiator 50°C max, Fans driven by Belt, with safety Guard
- Hand pump special for take out dirty oil







Open Type

Silent Type

Generator Set Ratings						
Voltage	Frequency	Phase	P.F (COS ϕ)	Prime Current Amps	Standby Power (KW/KVA)	Prime Power (KW/KVA)
440/254	50	3	0.8	328	220/275	200/250
415/240	50	3	0.8	347.8	220/275	200/250
400/230	50	3	0.8	361	220/275	200/250
380/220	50	3	0.8	380	220/275	200/250

Prime Power(PRP):Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820-97(eqvISO8528);10% overload capability is available for a period of 1 hour within a 12-hour period of operation. Standby Power Rating (STP): The standb

Dimension & Weight Of Generator Set	
Dimension(L*W*H)/CM For Open Type	250×100×165 CM
Net Weight/KG For Open Type	1700KGS
Dimension(L*W*H)/CM For Silent Type	370×135×195 CM
Net Weight/KG For Silent Type	2450KGS
Dimension (L*W*H)/MM For Trailer Type	
Net Weight/KG For Trailer Type	

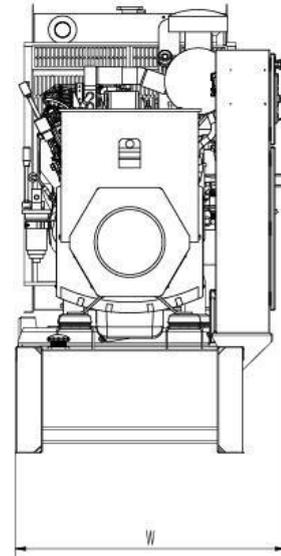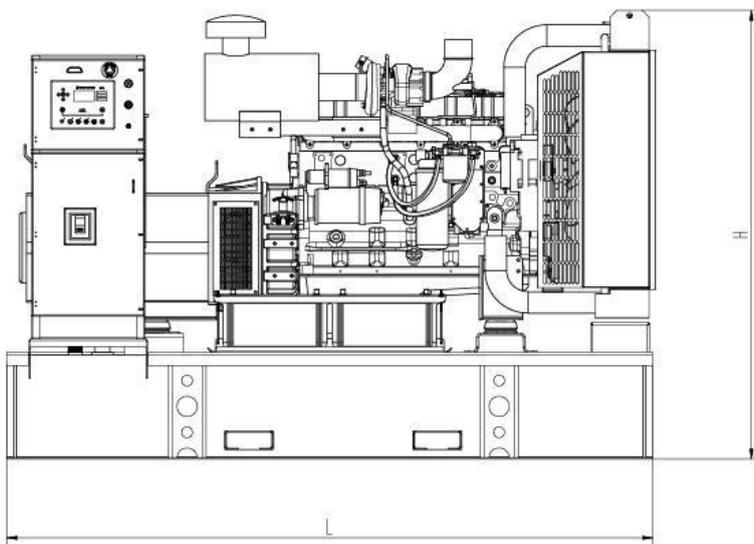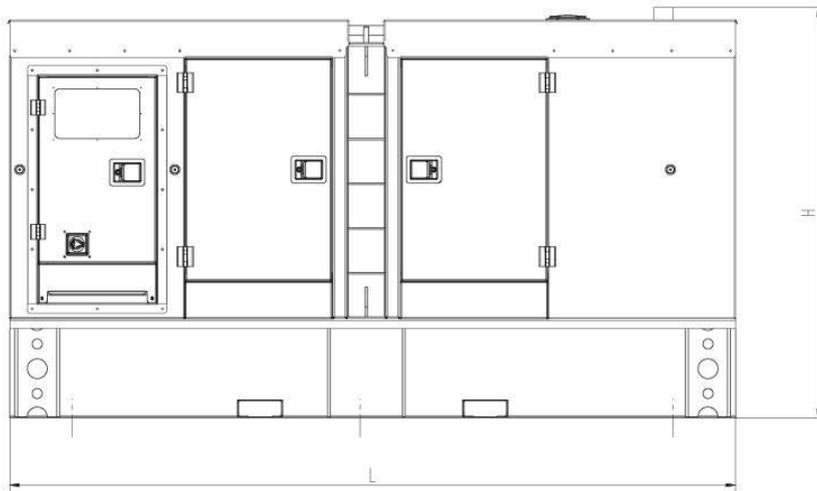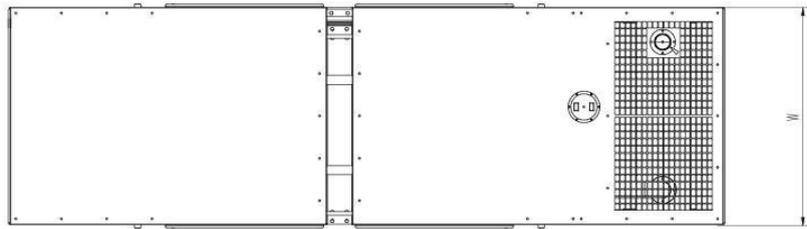

Specification of Engine		
Basic Specific ation	Engine Model	1206A-E70TAG3
	Manufacturer	PERKINS Company
	Prime Power	217KW/291HP
	Standby Power	239KW/320HP
	Engine Configuration	6Cylinder In Line, 4Stroke,Direct Injection
	Gas Feeding Model	Turbocharged,Air to Air
	Bore × Stroke	105×135(MM)
	Displacement	7.01L
	Rated Speed	1500RPM
	Speed Governor	Electric Governor
	Starter Model	24V DC Start
	Cooling System	Water Cool
	Compression Ratio	15.8:1
	Exhaust System	Exhaust Gas Flow
Exhaust Temperature		528°C
Max Back Pressure		35kPa
Air Intake System	Max Intake Restriction	6.22kPa
	Burning Capacity	16.4M ³ /Min
	Air Flow	8180L/s
Fuel System	Fuel Consumption (Prime Power 100%) Load	56.9L/H
	Fuel Consumption (Prime Power 75%) Load	41.5L/H
	Fuel Tank Capacity	480L
Lubricat ion System	Oil Capacity	16L
	Oil Consumption	≤0.1% of Fuel Consumption
	Oil Pressure at Rated RPM	241-345kPa
Cooling System	Total Coolant Capacity	85L
	Thermostat Open Temperature	82-93°C
	Max Coolant Temperature	104°C


Specification of Alternator		
Basic Specification	Alternator Model	TAL-A46-D
	Manufacturer	LEROYSOMER company
	Prime Output	200KW/250KVA
	Standby Output	220KW/275KVA
	Excitation Model	Brushless, Self-Exciting
	Cooling Method	Air Cooling
	Connection Type	3 Phase and 12 Wires "Star" Connection
	Power Factor	0.8
	Protection Class	IP23
	Insulation Class	H
	Altitude	≤1000m
	Voltage Regulation, Steady State	≤ ±1%
	Telephone Influence Factor	<50
	Sudden Voltage Warp (100% Sudden Reduce)	≤ ±1%
	Sudden Voltage Warp (Sudden Increase)	≤ ±25%
	Voltage Stable Time (100% Sudden Reduce)	≤6S
	Voltage Stable Time (Sudden Increase)	≤6S
	Frequency Reduce	0-5% adjustable
	Frequency Regulation, Stead State	≤1.5%
	Frequency Waving	≤0.8%
	Sudden Frequency Warp (100% Sudden Reduce)	≤+12%
	Sudden Frequency Warp (100% Sudden Increase)	≤-10%
	Frequency Recovery Time (100% Sudden Reduce)	≤5S
Frequency Recovery Time (Sudden Increase)	≤5S	
Compliance GB755,BS5000,VDE0530,NEMAMG1-22,IED34-1,CSA22.2 and AS1359 Stands		

Control Panel System	
1.SINGLE SET GEN-SET CONTROLLER	
SUM : They meet all possible requirements for AMF applications,including modem control,user configuration and full gen-set monitoring and protection. AMF models enable the combination of manual and remote start application with auto mains fail function.	
KEY FEATURES:	
1. High water Temperature Shutdown	
2. Low Oil Pressure Shutdown	
3. Over Speed Shutdown	
4. Over Crank Shutdown	
5. Function as Emergent Stop	
6. Heated Display Option	
7. Breaker Control Buttons on Front Fascia	
8. Alternative Configuration (50Hz/60Hz)	
9.Support ATS Function	
KEY FEATURES:	
1. High Water Temperature Shutdown	
2. Low Oil Pressure Shutdown	
3. Over Speed Shutdown	
4. Over Crank Shutdown	
5. Function as Emergent Stop	
6. With Remote Teleport Communication RS 485	
7. Heated Display Option.	
8. Alternative Configuration (50HZ/60HZ)	c.DSE 7320
9. Support ATS Function	
10. Remote Communications (RS232 & RS485)	
11. Fuel Usage Monitor And Low Level Alarms.	
12. Engine Specific J1939 for All Major Manufacturers	
13. Configurable Display Languages.	
14. Load Switching, Load Shedding&Dummy Load Outputs.	
15. Alternative Configuration (50Hz/60Hz)	d.ComAp AMF 25

2.MULTIPLE PARALLELING GEN-SETS WITH INTERNAL LOAD-SHARING CONTROLLER

SUM: Functionality,optimized for ease of use,installation and configuration,includes built-in synchronization and digital isochronous active and reactive load sharer.Native co-operation of up to 32 gen-sets is a standard feature.

KEY FEATURES:

1. The Most up to 32-set Synchronization	
2. Wide Range of Communication Interfaces - RS232,RS485, USB, Modbus, GSM/Analog Modem,GPRS, Ethernet	
3. Direct Governor & AVR Control	
4. kW & kV Ar Load Sharing	
5. Advanced Power Management Function	
Load Dependent Start/Stop	
Load Demand Swap	
Running Hours Equalization	
6. Support of Electronic Controlled Engines (J1939,Modbus)	


a.DSE 8610

b.ComAp IC-NT NINT

Generator Set Options and Accessories

Generator Set Design	Control System
combination allows the gen-set with interrupt free via Open Type mode.	systems as well as in continuous parallel to mains AMF(Automatic Management Function)

KEY FEATURES:

1. Mains (Utility) Failure Detection, Mains (Utility) Power Monitoring (kW, kV Ar, kV A & pf) Monitoring, Mains (Utility) Decoupling Protection, Mains (utility) kW Export Protection.	
2. Remote Communications (RS232, RS485 x2, Ethernet)	
3. High Tariff Avoidance, Peak Shaving, Peak Lopping	
4. Synchronization of MCB (Reverse Synchronization)	
5. Support of Electronic Controlled Engines (J1939, Modbus)	
6. Wide Range of Communication Interfaces - RS232, RS485, USB, Modbus, GSM/Analog Modem, GPRS, Ethernet	

a.DSE 8620

b.ComAp IC-NT SPtM

Silent Type	<input type="checkbox"/>	ATS(Automatic Transfer System	<input type="checkbox"/>
Super Silent Type	<input type="checkbox"/>	ASS(Automatics Synchronization System)	<input type="checkbox"/>
Trailer Type	<input type="checkbox"/>	Remote Control Puma	<input type="checkbox"/>
Fuel System		Alternator	
12 Hour Base Tank(single wall)	<input type="checkbox"/>	PMG(EBS) Excitation	<input type="checkbox"/>
24 Hour Base Tank(single wall)	<input type="checkbox"/>	Space Heater	<input type="checkbox"/>
Dual Wall Base Fuel Tank	<input type="checkbox"/>	Preheater System	
Outside Fuel Tank	<input type="checkbox"/>	Coolant Preheater	<input type="checkbox"/>
Automatic Refueling Compensation System	<input type="checkbox"/>	Oil Preheater	<input type="checkbox"/>
Exhaust System		Battery Preheater	<input type="checkbox"/>
Residential Exhaust Silencer	<input type="checkbox"/>		
Circuit Breaker Brand			
CHNT	<input type="checkbox"/>		
ABB	<input type="checkbox"/>		