

NEW



## HYDRAULIC EXCAVATOR | JS200/210/220/NLC/SC/LC

Engine power: 129kW (173hp) Bucket capacity: 0.4 – 1.19m<sup>3</sup> Operating weight: 19618 – 22490kg

**JCB**

# STRENGTH INSIDE AND OUT.

BEFORE YOU BUY AN EXCAVATOR, YOU NEED TO KNOW IT'S GOING TO BE TOUGH ENOUGH TO PERFORM ANY JOB YOU ASK OF IT. FORTUNATELY, WITH A JCB JS200/210/220, STRENGTH AND DURABILITY COME AS STANDARD.



1



2

## Boom and dipper.

- 1 A new reinforced boom and dipper is made of high tensile strength steel, with three piece wrapper plates and cast ends for strength and durability.
- 2 Our advanced manufacturing and assembly processes produce high precision and quality assembled components.

## Componentry.

- 3 Our engine technology is tried and proven; we've built 200,000 DIESELMAX units since 2004.
- 4 JCB JS200/210/220s boast the best components in the industry, including Berco running gear, Kawasaki pumps, Kayaba valve blocks and JCB DIESELMAX engines.

We use Finite Element Analysis with extensive rig and endurance testing to make key components last longer.



3



4





## Structural strength.

- 5** The high-strength undercarriage of a JCB JS200/210/220 uses a fully-welded X frame construction for long-term durability even in the most demanding applications.
- 6** A closed box section revolving frame increases strength and reduces stress. It's also highly resistant to impact damage.
- 7** The high-strength rigid upper frame provides maximum durability and support.
- 8** Our stiff, durable door design gives great strength and rigidity.

### UNEARTHED: KEY FACT

The JCB JS200/210/220 turret is welded to both the upper and lower undercarriage frame.

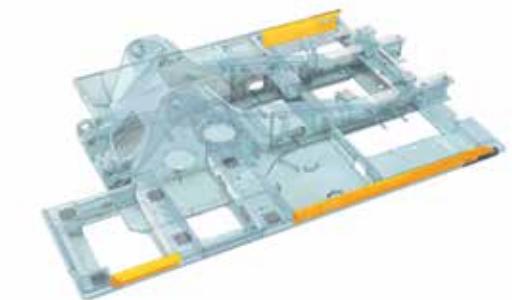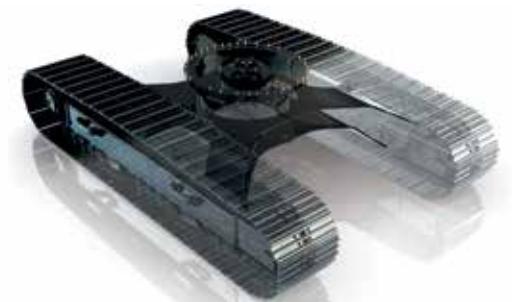**8****7****5****6**

# MAXIMUM PRODUCTIVITY, MINIMUM SPEND.

SAVING MONEY AND TIME IS MORE IMPORTANT THAN EVER, SO WE'VE MADE SURE THE NEW JCB JS200/210/220'S COMPONENTRY – INCLUDING THE DIESELMAX ENGINE – WORKS IN PERFECT HARMONY. IN TURN, YOU GET A MACHINE THAT'S AS EFFICIENT AND PRODUCTIVE AS POSSIBLE.

The JS200/210/220 is a hugely versatile machine that's made all the more so by a big range of attachments, enabling you to carry out a wide range of tasks.



## Versed in versatility.

1 JCB's quickhitch system makes attachment changing fast and easy, and is purpose-designed for the JS range.

For ultra versatility, JCB offers a full list of auxiliary pipework options including hammer, auxiliary, and low flow.

Choose the optional rubber street pads and you can use the JS200/210/220 on sensitive grounds like tarmac without causing damage.




## Upping output.

- 2** Simultaneous tracking and excavating is smooth and fast with an intuitive multifunction operation.
- 3** A JCB JS200/210/220 has a solid, stable work platform for fast cycle times.
- 4** With a massive 15200 Kgf bucket tearout and fast cycle times, the JS200/210/220 is extremely productive in all applications.
- 5** JCB's innovative hydraulic regeneration system means oil is recycled across the cylinders for faster cycle times and reduced fuel consumption.



## The efficient excavator.

- 6** JCB's new DIESELMAX engines use up to 10% less fuel than our Tier 3 units, saving you money. This is partly due to the fact that DIESELMAX engines produce high torque at just 1500 – 1600 rpm, making for improved fuel-efficient matching of the hydraulics.
- 7** To reduce noise pollution from unnecessary air flow, the engine-driven cooling fan has a proportional control system, maintaining optimum fan speed.
- 8** The JS200/210/220 variable power bands allow you to tailor performance – and therefore economy – to specific tasks.

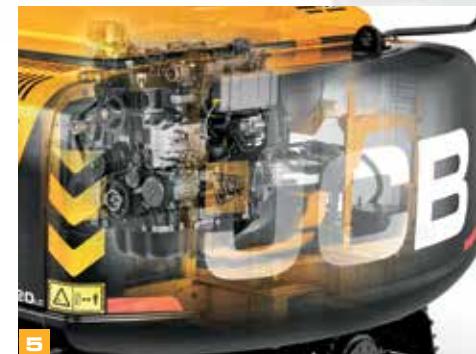

## A COMFORTABLE FAVOURITE.

JCB EXCAVATORS ARE DESIGNED AROUND THE OPERATOR. THAT'S GOOD FOR THEM BUT EVEN BETTER FOR YOU; AFTER ALL, GREAT COMFORT AND EASE OF USE EQUALS GREAT PRODUCTIVITY.



### Excellent visibility.

- 1 A 70/30 front screen split gives JCB JS200/210/220 excellent front visibility. A clear view of the front right track provides easy, safe trench digging and manoeuvring.
- 2 An innovative low-level bonnet provides excellent rearward visibility.

### Comfortably in control.

- 3 The 3.5" colour monitor multi-function display is easy to read in all light conditions, provides instant operational information, and has a customisable home screen.

The JS200/210/220 Tool Select feature can set up auxiliary hydraulic circuits quickly and accurately to match flow and pressure requirements of any attachment.





### The working environment.

**4** The JS200/210/220 creates a quieter working environment inside and out. Because we've reduced noise levels to 72dB(A) inside and 103dB(A) outside, you can use the machine at any location, anytime.

JCB JS200/210/220 cabs use 6 viscous rubber mounts to minimise noise and vibration.

The positive pressure cab keeps out dirt and dust.

**5** JCB's climate control option offers a precisely controlled cab temperature with fresh or recirculated air. Demisting/defrosting functions keep the front window clear.


**6** There's a spacious luggage tray behind the operator's seat.

**7** A large floor area with large high grip pedals gives easy and precise tracking.



# LESS SERVICING, MORE SERVICE.

WE'VE DESIGNED THE JCB JS200/210/220 TO BE LOW MAINTENANCE AND EASILY SERVICEABLE. THIS MAKES IT AFFORDABLE, EFFICIENT AND HIGHLY PRODUCTIVE, HELPING YOU GET THE BEST SERVICE FROM YOUR MACHINE.

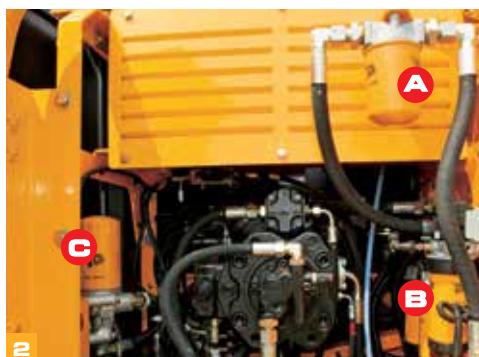

## Easy does it.

- 1 The air filter on a JS200/210/220 is easily accessible, and a double-element construction simplifies cleaning.
- 2 The filters on a JS200/210/220 (engine oil, hydraulic oil and fuel) are centrally located for fast, easy servicing.
- 3 Because they're mounted side by side, the engine radiator, hydraulic cooler and intercooler can be serviced individually yet cleaned easily.



### UNEARTHED: KEY FACT

JCB JS200/210/220 grease points are centralised for safe and easy access to high level pivots.

### SERVICE INTERVALS

Engine oil and oil filter	Every <b>500</b> hours
Hydraulic oil filter	Every <b>1000</b> hours
Hydraulic oil	Every <b>5000</b> hours



3

**JCB JS200/210/220 bonnets open and close easily with gas-assisted cylinders, and the service bays are large and wide for good access.**



## Here to help.

- 4** We've eliminated the need for a visibowl style pre-cleaner on the JS200/210/220 with our new scavenger filtration system. This uses suction from the cooling fan to remove heavier particles from the induction system.
- 5** Our innovative recalibration option allows EcoMAX to run on lower grade fuels. This means the JS200/210/220 can be resold across different territories, which improves residuals.
- 6** JCB's In-Cab Monitor checks engine oil levels, coolant, and system errors on start-up.



# THE SAFE CHOICE.

ON-SITE SAFETY IS CRUCIAL, SO WE'VE DESIGNED THE JCB JS200/210/220 TO INCORPORATE AS MANY CUTTING EDGE SAFEGUARDS AS POSSIBLE. IN SHORT, YOUR OPERATORS ARE IN SAFE HANDS.



- 1 The JS200/210/220 bonnet opens front-to-rear for easy and safe engine service access.
- 2 For extra peace of mind, JCB JS200/210/220 cabs are available with an integral Rollover Protection Structure (ROPS). It's also easy to fit JCB's Falling Objects Protection Structure (FOPS), thanks to standard fitment mounting brackets.
- 3 JCB's Safety Level Lock fully isolates hydraulic functions to avoid unintended movements. Our 2GO system means a JCB JS200/210/220 can only be started in a safe locked position via two separate inputs.
- 4 JCB JS200/210/220s have a large glass area and low bonnet line for superb visibility.
- 5 A JCB JS200/210/220's steps and platforms have anti-slip punched steel plates for optimum grip, even in wet or icy conditions. Bolt-on plates have recessed bolts to reduce trip hazards.



3



6 Your JS200/210/220 is equipped with a full set of side and rear view mirrors for all round visibility and safety compliance.

7 There's no need to climb onto the JS200/210/220 to check oil levels; all routine servicing can be done from ground level.

8 Optional safety rails protect operators from falls when they're on the upper structure of the JS200/210/220.

The JS200/210/220's optional beacons can improve on-site safety still further.

9 Choose LED work lights for an even better field of vision on the JS200/210/220.



# LIVELINK, WORK SMARTER.

**LIVELINK IS AN INNOVATIVE SOFTWARE SYSTEM THAT LETS YOU MANAGE JCB MACHINES REMOTELY – ONLINE, BY EMAIL OR BY MOBILE PHONE. ACCESS EVERYTHING FROM MACHINE ALERTS TO FUEL REPORTS AND HISTORY INFORMATION, WITH ALL DATA STORED AT A SECURE CENTRE.**

## Productivity and cost benefits.

By providing information like idle time monitoring and machine fuel consumption, JCB Livelink helps reduce your fuel usage, saving money and improving productivity. Machine location information can help improve efficiency and perhaps even reduce insurance costs.



## Maintenance benefits.

Manage machine maintenance easily – accurate hours monitoring and service alerts improve maintenance planning, while real-time location data helps you manage your fleet. Critical machine alerts and maintenance history records are also available.



## Security benefits.

Livelink's real-time geofencing alerts tell you when machines move out of predetermined zones, and real-time curfew alerts inform you of unauthorised usage. Further benefits include real-time location information, advanced ECU matching (pairs Livelink with the immobiliser or ECU).



## VALUE ADDED.

JCB'S WORLDWIDE CUSTOMER SUPPORT IS FIRST CLASS. WHATEVER YOU NEED AND WHEREVER YOU ARE, WE'LL BE AVAILABLE QUICKLY AND EFFICIENTLY TO HELP MAKE SURE YOUR MACHINERY IS PERFORMING TO ITS FULL POTENTIAL.



1



2




3

**1** Our Technical Support Service provides instant access to factory expertise, day or night, while our Finance and Insurance teams are always on hand to provide fast, flexible, competitive quotes.



**2** The global network of JCB Parts Centres is another model of efficiency; with 15 regional bases, we can deliver around 95% of all parts anywhere in the world within 24 hours. Our genuine JCB parts are designed to work in perfect harmony with your machine for optimum performance and productivity.

**3** JCB Assetcare offers comprehensive extended warranties and service agreements, as well as service-only or repair and maintenance contracts. Irrespective of what you opt for, our maintenance teams around the world charge competitive labour rates, and offer non-obligation quotations as well as fast, efficient insurance repair work.

Note: JCB LIVELINK and JCB ASSETCARE may not be available in your region, so please check with your local dealer.

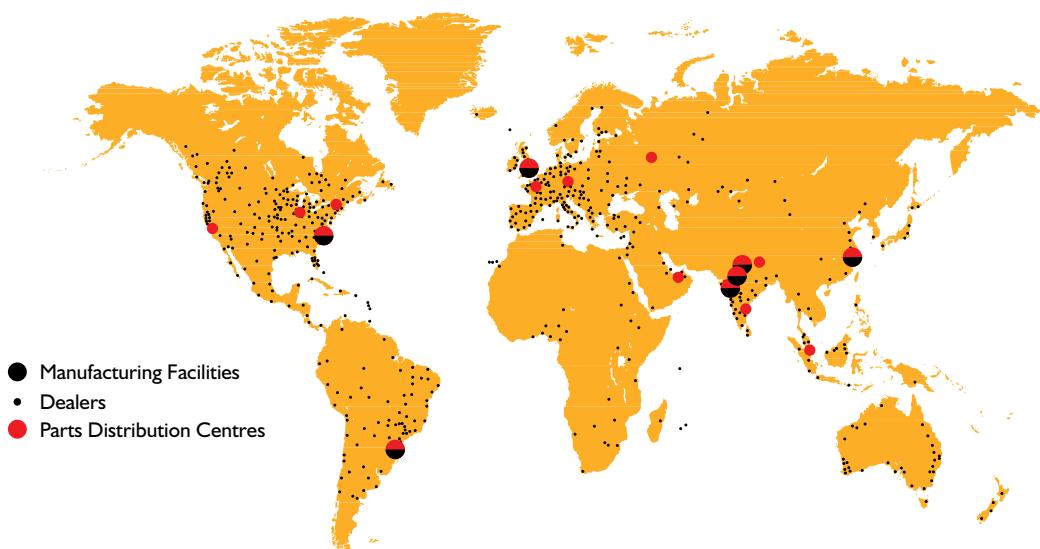

## STATIC DIMENSIONS

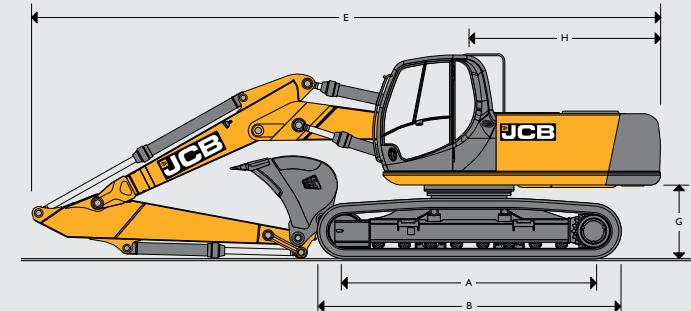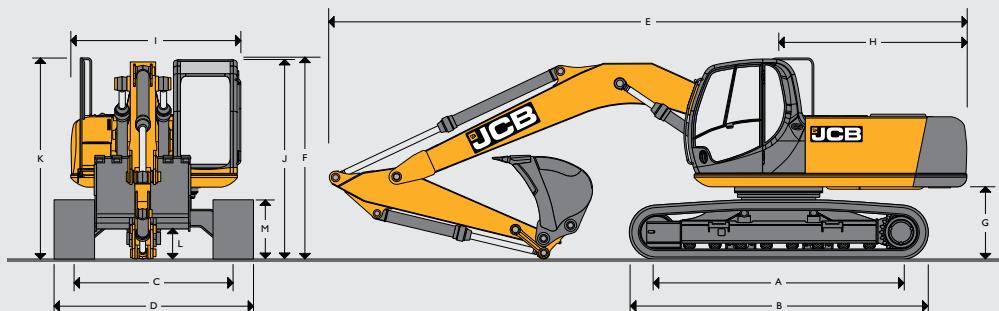

Dimensions in mm			JS200			JS210			JS220			JS220 T.A.B			
	NLC	SC	LC	NLC	LC	NLC	SC	LC	NLC	SC	LC	NLC	SC	LC	
A Track CTR	3660	3370	3660	3660	3660	3660	3370	3660	3660	3370	3660	3660	3370	3660	
B Undercarriage overall length	4460	4170	4460	4460	4460	4460	4170	4460	4460	4170	4460	4460	4170	4460	
C Track gauge	1990	2170	2390	1990	2170	1990	2170	2390	1990	2170	2390	1990	2170	2390	
D Width over tracks (500mm trackshoes)	2490	2670	—	2490	—	2490	2670	—	2490	2670	—	2490	2670	—	
D Width over tracks (600mm trackshoes)	2590	2770	2990	2590	2770	2590	2770	2990	2590	2770	2990	2590	2770	2990	
D Width over tracks (700mm trackshoes)	2690	2870	3090	2690	2870	2690	2870	3090	2690	2870	3090	2690	2870	3090	
D Width over tracks (800mm trackshoes)	2790	2970	3190	2790	2970	2790	2970	3190	2790	2970	3190	2790	2970	3190	
D Width over tracks (900mm trackshoes)	—	—	3290	—	3070	—	—	3290	—	—	3290	—	—	—	
<b>Dipper lengths</b>	<b>1.91m</b>	<b>2.40m</b>	<b>3.0m</b>	<b>1.91m</b>	<b>2.40m</b>										
E Transport length with Monoboom	9584	9584	9584	9584	9584	9584	9584	9584	9584	9584	9584	9584	9600	9600	
F Transport height with Monoboom	3070	3070	3070	3070	3070	3070	3070	3070	3070	3070	3070	3070	3085	3085	
G Counterweight clearance	1046			1046			1046			1046			1046		
H Tailswing radius	2825			2825			2825			2825			2825		
I Width of superstructure - upper	2548			2548			2548			2548			2548		
J Height over cab	2996			2996			2996			2996			2996		
K Height over grab rail	3037			3037			3037			3037			3037		
L Ground clearance	503			503			503			503			503		
M Track height	885			885			885			885			885		

## BUCKET AND ARM COMBINATION

JS200/210										JS220								
	NLC			SC			LC			NLC			SC			LC		
Arm length	1.9m	2.4m	3.0m	1.9m	2.4m	3.0m	1.9m	2.4m	3.0m	1.9m	2.4m	3.0m	1.9m	2.4m	3.0m	1.9m	2.4m	3.0m
GP Bucket 610mm, 0.34m <sup>3</sup>	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
GP Bucket 762mm, 0.48m <sup>3</sup>	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
GP Bucket 914mm, 0.62m <sup>3</sup>	□	□	■	□	□	□	□	□	□	□	■	□	□	□	□	□	□	□
GP Bucket 1219mm, 0.89m <sup>3</sup>	■	■	●	□	□	■	□	□	□	■	●	□	□	■	□	□	■	■
GP Bucket 1372mm, 1.02m <sup>3</sup>	■	●	●	□	■	●	□	■	●	●	●	●	●	●	●	□	■	■
GP Bucket 1524mm, 1.20m <sup>3</sup>	✗	✗	✗	■	●	✗	■	●	✗	■	●	●	●	■	●	□	●	●

□ = Suitable for general excavating (materials up to 2000kg/cu.m)  
 ■ = Suitable for light excavating (materials up to 1600kg/cu.m)  
 ● = Suitable for grading & loading materials up to 1200kg/cu.m)  
 ✗ = Not recommended  
 \* Bucket capacity recommendations with no quick hitch fitted

**WEIGHTS AND GROUND BEARING PRESSURES**

Figures include 1.14m<sup>3</sup>, bucket 760kg, operator, full fuel tank and 2.4m dipper.

		500mm shoes	600mm shoes	700mm shoes	800mm shoes	900mm shoes
<b>JS200 NLC MONO</b>						—
Machine weight	kg	19845	20095	20350	—	—
Ground bearing pressure	kg/cm	0.50	0.43	0.37	—	—
<b>JS200 SC MONO</b>						
Machine weight	kg	19925	20180	20430	—	—
Ground bearing pressure	kg/cm	0.55	0.46	0.40	—	—
<b>JS200 LC MONO</b>						
Machine weight	kg	—	20605	20870	21140	21190
Ground bearing pressure	kg/cm	—	0.44	0.38	0.34	0.30
<b>JS210 LC MONO</b>						
Machine weight	kg	—	21090	21355	21625	21675
Ground bearing pressure	kg/cm	—	0.45	0.39	0.34	0.31
<b>JS220 NLC MONO</b>						
Machine weight	kg	21144	21396	21648	—	—
Ground bearing pressure	kg/cm	0.54	0.45	0.39	—	—
<b>JS220 SC MONO</b>						
Machine weight	kg	21227	21479	21731	—	—
Ground bearing pressure	kg/cm	0.58	0.49	0.43	—	—
<b>JS220 LC MONO</b>						
Machine weight	kg	—	21904	22172	22440	22490
Ground bearing pressure	kg/cm	—	0.46	0.40	0.36	0.32
<b>JS220 NLC TAB</b>						
Machine weight	kg	22194	22446	22698	—	—
Ground bearing pressure	kg/cm	0.56	0.47	0.41	—	—
<b>JS220 SC TAB</b>						
Machine weight	kg	22277	22529	22781	—	—
Ground bearing pressure	kg/cm	0.61	0.51	0.45	—	—
<b>JS220 LC TAB</b>						
Machine weight	kg	—	22954	23222	23490	23540
Ground bearing pressure	kg/cm	—	0.49	0.42	0.37	0.33

**ENGINE**


Model	JCB DIESELMAX Tier II.
Type	4-stroke, 4-cylinder in-line, direct injection, turbocharged diesel.
Nett power (ISO 3046-1 INF)	129kW (173hp)
Piston displacement	4.8 litres
Injection	Electronic injection.
Air filtration	Dry element with secondary safety element and in cab warning indicator.
Cooling	Water cooled via large capacity radiator.
Starter motor	24 volt – 4.5kW.
Batteries	2 x 12 volt Heavy-duty.
Alternator	24 volt 40 amp.
Refuelling pump	Electric type.

**WORKING RANGE MONOBLOCK**

Boom length	5.70m			
Dipper length		1.91m	2.40m	3.00m
A Maximum digging reach	m	8.72	9.32	9.85
B Maximum digging reach (on ground)	m	8.52	9.15	9.65
C Maximum digging depth	m	5.52	5.98	6.70
D Maximum digging height	m	8.67	8.99	9.21
E Maximum dumping height	m	6.19	6.45	6.66
F Maximum vertical wall cut depth	m	5.17	5.25	5.82
G Minimum swing radius	m	3.76	3.78	3.65
Bucket rotation	deg	183°	183°	183°
Dipper tearout (ISO 6015)	kgf	13450	11560	9590
Dipper tearout with boost (ISO 6015)	kgf	14610	12550	10410
Bucket tearout (ISO 6015)	kgf	14550	14550	14550
Bucket tearout with boost (ISO 6015)	kgf	15800	15800	15800

**WORKING RANGE T.A.B**

Boom length	5.70m			
Dipper length		1.91m	2.40m	3.00m
A Maximum digging reach	m	9.00	9.44	9.98
B Maximum digging reach (on ground)	m	8.81	9.26	9.81
C Maximum digging depth	m	5.25	5.72	6.29
D Maximum digging height	m	10.24	10.61	11.00
E Maximum dumping height	m	7.35	7.70	8.07
F Maximum vertical wall cut depth	m	3.91	4.51	5.05
G Minimum swing radius	m	2.50	2.55	2.29
Bucket rotation	deg	183°	183°	183°
Dipper tearout (ISO 6015)	kgf	13450	11560	9590
Dipper tearout with boost (ISO 6015)	kgf	14610	12550	10410
Bucket tearout (ISO 6015)	kgf	14550	14550	14550
Bucket tearout with boost (ISO 6015)	kgf	15800	15800	15800

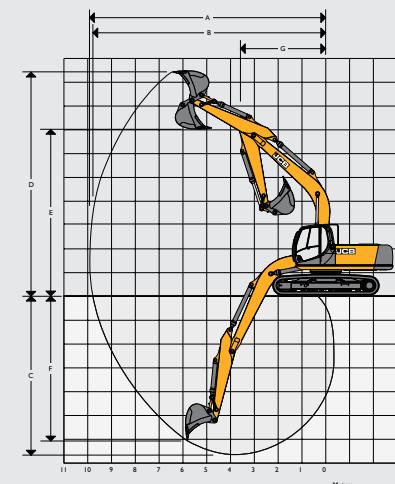

<b>UNDERCARRIAGE</b>		<b>SWING SYSTEM</b>		
Carriage options	SC-Standard, NC-Narrow and LC-Long Carriage.	Swing motor	Axial piston.	
Recovery point	Front and rear.	Swing brake	Hydraulic braking plus automatic spring applied disc type parking brake.	
Track type	Sealed and greased.	Final drive	Planetary reduction.	
Track shoe options	NC & SC – 500mm (20in), 600mm (24in), 700mm (28in). LC – 600mm (24in), 700mm (28in), 800mm (31.5in), 900mm (36in).	Swing speed	12.9rpm.	
Upper & lower rollers	Heat treated, sealed and lubricated.	Swing gear	Large diameter, internally toothed fully sealed grease bath lubricated.	
Track adjustment	Grease cylinder type.	Swing lock	Switchable brake in cab.	
Track idler	Sealed and lubricated, with spring cushioned recoil.			
<b>NC &amp; SC</b>		<b>LC</b>		
No. of track guides	2 per side	2 per side	Pumps	
No. of lower rollers	7 per side	8 per side	Main pumps	2 variable displacement axial piston type.
No. of upper rollers	2 per side	2 per side	Maximum flow	2 x 224 L/min
No. of track shoes	46 per side	49 per side	Servo pump	Gear type.
			Maximum flow	448 L/min
<b>TRACK DRIVE</b>				
Type	Fully hydrostatic, three speed with autoshift between high and medium speed.			
Travel motors	Variable swash axial piston type, fully guarded within undercarriage frame.			
Final drive	Planetary reduction, bolt-on sprockets.			
Service brake	Hydraulic counter balance valve to prevent overspeeding on gradients.			
Park brake	Disc type, spring applied, automatic hydraulic release			
Gradeability	70% (35 deg) continuous.			
Travel speed	High – 5.6 km/h (3.4 mph). Mid – 3.3 km/h (2.1 mph).			
	Low – 2.3 km/h (1.4 mph).			
Tractive effort	191.9kN (19570 kgf, 43144 lbf).			
<b>HYDRAULIC SYSTEM</b>				
Relief valve settings				
Boom/Arm/Bucket	343 bar			
With power boost	372 bar			
Swing circuit	279 bar			
Travel circuit	343 bar			
Pilot control	40 bar			
<b>Filtration</b>				
In tank	150 micron, suction strainer.			
Main return line	10 micron, fibreform element.			
Pilot line	10 micron, paper element.			
Hydraulic hammer return	10 micron, reinforced microform element.			
<b>SERVICE CAPACITIES</b>		<b>JS200/210/220 (Litres)</b>		
Fuel tank		343		
Radiator		25.5		
Engine oil		20.4		
Swing drive		5.0		
Hydraulic tank		120		
Final drive (each side)		4.7		

**LIFT CAPACITIES – DIPPER LENGTH: 1.9M, MONOBOOM: 5.7M, TRACKSHOES: 500MM, NO BUCKET.****JS200 NLC MONO**

Reach	3m	4.5m	6m	7.5m	Capacity at Max Reach
Load Point Ht.	kg	kg	kg	kg	kg
6.0m			6230*	4020	6270* 3810 6191
4.5m		7840*	5990	3910	5660 3070 6983
3.0m		9720*	5510	3720	5090 2740 7390
1.5m			6820	3540	4920 2620 7477
0m	10600	5060	6710	3440	5100 2690 7255
-1.5m	10620*	5080	6700	3440	5730 3000 6693
-3.0m	12870*	9750	5200		7400 3810 5690

**LIFT CAPACITIES – DIPPER LENGTH: 2.4M, MONOBOOM: 5.7M, TRACKSHOES: 500MM, NO BUCKET.****JS200 NLC MONO**

Reach	3m	4.5m	6m	7.5m	Capacity at Max Reach
Load Point Ht.	kg	kg	kg	kg	kg
6.0m			5630*	4080	5290* 3320 6755
4.5m		7130*	6090	3940	5070 2750 7486
3.0m		9020*	5600	3730	4610 2470 7868
1.5m		10630*	5200	3530	4470 2370 7949
0m	10550	5010	6670	3400	4600 2420 7741
-1.5m	10630*	9340	10520	4990	5080 2650 7218
-3.0m	14070*	9520	10190*	5070	6260 3240 6300
-4.5m	10600*	9900	7520*	5340	6930* 4950 4760

**LIFT CAPACITIES – DIPPER LENGTH: 3.0M, MONOBOOM: 5.7M, TRACKSHOES: 500MM, NO BUCKET.****JS200 NLC MONO**

Reach	3m	4.5m	6m	7.5m	Capacity at Max Reach	
Load Point Ht.	kg	kg	kg	kg	kg	
7.5m			4540*	4160	3900* 3890 6226	
6.0m					3660* 2930 7332	
4.5m			5530*	3990	3630* 2470 8011	
3.0m	11850*	10360	8140*	5720	3760 4990 2670 3750* 2230 8367	
1.5m		9960*	5250	6830	3530 4860 2560 4020* 2130 8444	
0m	6310*	6310*	10530	4980	3360 4760 2470 4150 2160 8249	
-1.5m	10480*	9100	10420	4890	3290 4720 2440 4510 2330 7760	
-3.0m	15210*	9250	10470	4930	3310	5350 2760 6916
-4.5m	12430*	9570	8850*	5110		6850* 3850 5552

Lift capacity front and rear.

Notes: 1. For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.

2. Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked\* are based on hydraulic capacity.

3. Lift capacities assume that the machine is on firm, level ground.

4. Lift capacities may be limited by local regulations. Please refer to your dealer.

Lift capacity full circle.

## LIFT CAPACITIES – DIPPER LENGTH: 1.9M, MONOBOOM: 5.7M, TRACKSHOES: 600MM, NO BUCKET.

JS200 SC MONO

Reach	3m	4.5m	6m	7.5m	Capacity at Max Reach
Load Point Ht.	kg	kg	kg	kg	kg
6.0m			6230*	4430	6270* 4200 6191
4.5m		7840*	6660	4320	5130 3400 6983
3.0m		9720*	6160	4130	4610 3040 7390
1.5m			6130	3950	4450 2920 7477
0m		9340	5700	3850	4600 3000 7255
- 1.5m		9360	5720	3840	5160 3340 6693
- 3.0m	12870*	11190	9510	5850	6630 4250 5690

## LIFT CAPACITIES – DIPPER LENGTH: 2.40M, 5.70M MONOBOOM, TRACKSHOES: 600MM, NO BUCKET.

JS200 SC MONO

Reach	3m	4.5m	6m	7.5m	Capacity at Max Reach
Load Point Ht.	kg	kg	kg	kg	kg
6.0m			5630*	4490	5290* 3670 6755
4.5m		7130*	6770	4350	4600 3050 7486
3.0m		9020*	6260	4140	4180 2750 7868
1.5m		9510	5840	3940	4040 2640 7949
0m		9290	5650	3810	4150 2700 7741
- 1.5m	10630*	10630*	9260	3770	4580 2960 7218
- 3.0m	14070*	10950	9370	3840	5620 3610 6300
- 4.5m	10600*	10600*	7520*	5990	6930* 5540 4760

## LIFT CAPACITIES – DIPPER LENGTH: 3.0M, MONOBOOM: 5.7M, TRACKSHOES: 600MM, NO BUCKET.

JS200 SC MONO

Reach	3m	4.5m	6m	7.5m	Capacity at Max Reach
Load Point Ht.	kg	kg	kg	kg	kg
7.5m			4540*	4540*	3900* 3900* 6226
6.0m					3660* 3240 7332
4.5m			5530*	4410	3630* 2740 8011
3.0m	11850*	11840	8140*	6390	4170 3750* 2480 8367
1.5m		9590	5900	6130	3940 4390 2850 3670 2380 8444
0m	6310*	6310*	9260	5610	3770 4290 2760 3740 2420 8249
- 1.5m	10480*	10480*	9160	5520	3690 4260 2730 4060 2610 7760
- 3.0m	15210*	10670	9210	5570	3710 4280 2730 4820 3090 6916
- 4.5m	12430*	11010	8850*	5760	6790 4300 5552

Lift capacity front and rear.

Notes: 1. For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.

2. Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked\* are based on hydraulic capacity.

3. Lift capacities assume that the machine is on firm, level ground.

4. Lift capacities may be limited by local regulations. Please refer to your dealer.

Lift capacity full circle.

**LIFT CAPACITIES – DIPPER LENGTH: 1.9M, MONOBOOM: 5.7M, TRACKSHOES: 700MM, NO BUCKET.****JS200 LC MONO**

Reach	3m	4.5m	6m	7.5m	Capacity at Max Reach
Load Point Ht.	kg	kg	kg	kg	kg
6.0m			6360*	6360*	6270*
4.5m		7840*	7500	6580*	5870
3.0m		9720*	6990	7290	5290
1.5m				7080	5120
0m		11010	6510	6970	5300
- 1.5m		11000*	6530	6960	5950
- 3.0m	12870*	12870*	9660*	6660	7410*
					4810
					5690

**LIFT CAPACITIES – DIPPER LENGTH: 2.4M, MONOBOOM: 5.7M, TRACKSHOES: 700MM, NO BUCKET.****JS200 LC MONO**

Reach	3m	4.5m	6m	7.5m	Capacity at Max Reach
Load Point Ht.	kg	kg	kg	kg	kg
6.0m			5630*	5020	5290*
4.5m		7130*	7130*	6110*	5210*
3.0m		9020*	7080	6940*	4790
1.5m		10630*	6660	7080	4650
0m		10960	6460	6930	4780
- 1.5m	10630	10630*	10930	6430	5280
- 3.0m	14070*	12770	10190*	6530	6500
- 4.5m	10600*	10600*	7520*	6810	6930*
					6290
					4760

**LIFT CAPACITIES – DIPPER LENGTH: 3.0M, MONOBOOM: 5.7M, TRACKSHOES: 700MM, NO BUCKET.****JS200 LC MONO**

Reach	3m	4.5m	6m	7.5m	Capacity at Max Reach
Load Point Ht.	kg	kg	kg	kg	kg
7.5m			4540	4540*	3900*
6.0m					3660*
4.5m			5530*	4940	3630*
3.0m	11850*	11850*	8140*	7220	3080
1.5m		9960*	6710	7090	2810
0m	6310*	6310*	10930	6430	2750
- 1.5m	10480*	10480*	10820	6330	2700
- 3.0m	15210*	12480	10630*	6380	3510
- 4.5m	12430*	12430*	8850*	6570	6916
					4880
					5552

Lift capacity front and rear.

Notes: 1. For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.

2. Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked\* are based on hydraulic capacity.

3. Lift capacities assume that the machine is on firm, level ground.

4. Lift capacities may be limited by local regulations. Please refer to your dealer.

Lift capacity full circle.

## LIFT CAPACITIES – DIPPER LENGTH: 1.9M, MONOBOOM 5.7M, TRACKSHOES: 500MM, NO BUCKET

JS210 NLC MONO

Reach	3m	4.5m	6m	7.5m	Capacity at Max Reach	
Load Point Ht.	kg	kg	kg	kg	kg	mm
6.0m				6230*	4350	6120
4.5m			7840*	6470	4240	3350
3.0m			9720*	5990	4050	3000
1.5m				7290	3870	2880
0m			11330	5540	3770	2950
- 1.5m			11000*	5550	3770	3290
- 3.0m	12870*	10600	9660*	5680		6693
					7410*	5690
					4160	

## LIFT CAPACITIES – DIPPER LENGTH: 2.4M, MONOBOOM 5.7M, TRACKSHOES: 500MM, NO BUCKET.

JS210 NLC MONO

Reach	3m	4.5m	6m	7.5m	Capacity at Max Reach	
Load Point Ht.	kg	kg	kg	kg	kg	mm
6.0m				5630*	4400	3610
4.5m			7130*	6570	4270	3000
3.0m			9020*	6070	4060	2710
1.5m			10630*	5670	3860	2610
0m			11280	5490	3730	2660
- 1.5m	10630*	10190	11170*	5460	3690	2920
- 3.0m	14070*	10370	10190*	5550	3760	3550
- 4.5m	10600*	10600*	7520*	5810		6300
					5400	
					4760	

## LIFT CAPACITIES – DIPPER LENGTH: 3.0M, MONOBOOM 5.7M, TRACKSHOES: 500MM, NO BUCKET.

JS210 NLC MONO

Reach	3m	4.5m	6m	7.5m	Capacity at Max Reach	
Load Point Ht.	kg	kg	kg	kg	kg	mm
7.5m				4540*	4490	3900*
6.0m						3190
4.5m				5530*	4320	3630*
3.0m	11850*	11200	8140*	6200	4090	2450
1.5m			9960*	5720	3860	2350
0m	6310*	6310*	11020*	5450	3690	2390
- 1.5m	10480*	9950	11140	5360	3620	2580
- 3.0m	15210*	10100	10630*	5400	3640	3040
- 4.5m	8850*	10420	8850*	5590		6916
					4210	5552

Lift capacity front and rear.

Notes: 1. For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.

2. Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked\* are based on hydraulic capacity.

3. Lift capacities assume that the machine is on firm, level ground.

4. Lift capacities may be limited by local regulations. Please refer to your dealer.

Lift capacity full circle.

## LIFT CAPACITIES – DIPPER LENGTH: 1.9M, MONOBOOM 5.7M, TRACKSHOES: 700MM, NO BUCKET.

JS210 LC MONO

Reach	3m	4.5m	6m	7.5m	Capacity at Max Reach
Load Point Ht.	kg	kg	kg	kg	kg
6.0m			6230*	5350	6270* 5080 6191
4.5m		7840*	7840*	6580*	6280 4150 6983
3.0m		9720*	7560	7340*	5670 3730 7390
1.5m			7590	4860	5490 3590 7477
0m		11430*	7090	7470	5680 3700 7255
- 1.5m		11000*	7100	7460	6390 4120 6693
- 3.0m	12870*	12870*	9660*	7240	7410* 5230 5690

## LIFT CAPACITIES – DIPPER LENGTH: 2.4M, MONOBOOM 5.7M, TRACKSHOES: 700MM, NO BUCKET.

JS210 LC MONO

Reach	3m	4.5m	6m	7.5m	Capacity at Max Reach
Load Point Ht.	kg	kg	kg	kg	kg
6.0m			5630*	5320	5290* 4370 6755
4.5m		7130*	7130*	6110*	5210* 3660 7486
3.0m		9020*	7530	6940*	5060 3320 7868
1.5m		10630*	7100	7470	4910 3200 4949
0m		11320*	6900	7320	5060 3280 7741
- 1.5m	10630*	10630*	11170*	6880	4580 5580 3600 7218
- 3.0m	14070*	13610	10190*	6970	7350 4660 6860 4380 6300
- 4.5m	10600*	10600*	7520*	7250	

## LIFT CAPACITIES – DIPPER LENGTH: 3.0M, MONOBOOM 5.7M, TRACKSHOES: 700MM, NO BUCKET.

JS210 LC MONO

Reach	3m	4.5m	6m	7.5m	Capacity at Max Reach
Load Point Ht.	kg	kg	kg	kg	kg
7.5m			4540*	4540*	3900* 3900* 6226
6.0m					3660* 3660* 7332
4.5m			5530*	5330	3630* 3360 8011
3.0m	11850*	11850*	8140*	7800	6420*
1.5m			9960*	7290	7350*
0m	6310*	6310*	11020*	7000	7400
- 1.5m	10480*	10480*	11220*	6910	7310
- 3.0m	15210*	13570	10630*	6950	7340
- 4.5m	12430*	12430*	8850*	7150	

Lift capacity front and rear.

Notes: 1. For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.

2. Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked\* are based on hydraulic capacity.

3. Lift capacities assume that the machine is on firm, level ground.

4. Lift capacities may be limited by local regulations. Please refer to your dealer.

Lift capacity full circle.

## LIFT CAPACITIES – DIPPER LENGTH: 1.9M, MONOBOOM 5.7M, TRACKSHOES: 500MM, NO BUCKET.

JS220 NLC MONO

Reach	3m	4.5m	6m	7.5m	Capacity at Max Reach	
Load Point Ht.	kg	kg	kg	kg	kg	kg
6.0m			6230*	4730		6270*
4.5m		7840*	7020	6580*	4620	6300*
3.0m		9720*	6540	7340*	4430	5850
1.5m				7830	4260	5670
0m		11430*	6090	7720	4160	5870
- 1.5m		11000*	6110	7710	4150	6600
- 3.0m	12870*	11590	9660*	6230		7410*
						4570
						5690

## LIFT CAPACITIES – DIPPER LENGTH: 2.4M, MONOBOOM 5.7M, TRACKSHOES: 500MM, NO BUCKET.

JS220 NLC MONO

Reach	3m	4.5m	6m	7.5m	Capacity at Max Reach	
Load Point Ht.	kg	kg	kg	kg	kg	kg
6.0m			5630*	4790		5290*
4.5m		7130*	7120	6110*	4650	5210*
3.0m		9020*	6630	6940*	4450	5310
1.5m		10630*	6230	7770*	4250	5160
0m		11320*	6040	7680	4120	5310
- 1.5m	10630*	10630*	6020	7630	4080	5860
- 3.0m	14070*	11360	10190*	6100	7490*	4150
- 4.5m	10600*	10600*	7520*	6370		6930*
						5910
						4760

## LIFT CAPACITIES – DIPPER LENGTH: 3.0M, MONOBOOM 5.7M, TRACKSHOES: 500MM, NO BUCKET.

JS220 NLC MONO

Reach	3m	4.5m	6m	7.5m	Capacity at Max Reach	
Load Point Ht.	kg	kg	kg	kg	kg	kg
6.0m						3660*
4.5m			5530*	4710	5230*	3630*
3.0m	11850*	11850*	8140*	6750	6420*	3220
1.5m			9960*	6280	7350*	3110
0m	6310*	6310*	11020*	6000	7650	4020*
- 1.5m	10480*	10480*	11220*	5920	7560	4500*
- 3.0m	15210*	11090	10630*	5960	7580	5220
- 4.5m	12430*	11410	8850*	6140		4630
						5552

Lift capacity front and rear.

Notes: 1. For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.

2. Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked\* are based on hydraulic capacity.

3. Lift capacities assume that the machine is on firm, level ground.

4. Lift capacities may be limited by local regulations. Please refer to your dealer.

Lift capacity full circle.

**LIFT CAPACITIES – DIPPER LENGTH: 1.9M, MONOBOOM 5.7M, TRACKSHOES: 600MM, NO BUCKET****JS220 SC MONO**

Reach	3m	4.5m	6m	7.5m	Capacity at Max Reach
Load Point Ht.	kg	kg	kg	kg	kg
6.0m			6230*	5180	6270* 4920 6191
4.5m		7840*	7750	6580* 5070	5900 4030 6983
3.0m		9720*	7260	7270 4880	5320 3620 7390
1.5m				7070 4700	5160 3490 7477
0m		10790	6790	6960 4600	5330 3590 7255
- 1.5m		10810	6810	6950 4590	5980 4000 6693
- 3.0m	12870*	12870*	9660*	6940	7410* 5050 5690

**LIFT CAPACITIES – DIPPER LENGTH: 2.4M, MONOBOOM 5.7M, TRACKSHOES: 600MM, NO BUCKET.****JS220 SC MONO**

Reach	3m	4.5m	6m	7.5m	Capacity at Max Reach
Load Point Ht.	kg	kg	kg	kg	kg
6.0m			5630*	5240	5290* 4320 6755
4.5m		7130*	7130*	6110* 5110	5210* 3620 7486
3.0m		9020*	7350	6940* 4890	4840 3290 7868
1.5m		10630*	6930	7070 4690	4700 3180 7949
0m		10740	6740	6920 4560	4830 3250 7741
- 1.5m	10630*	10630*	10710	6720 4520	5310 3560 7218
- 3.0m	14070*	12960	10190*	6810 4590	6500 4320 6300
- 4.5m	10600*	10600*	7520*	7080	6930* 6560 4760

**LIFT CAPACITIES – DIPPER LENGTH: 3.0M, MONOBOOM 5.7M, TRACKSHOES: 600MM, NO BUCKET.****JS220 SC MONO**

Reach	3m	4.5m	6m	7.5m	Capacity at Max Reach
Load Point Ht.	kg	kg	kg	kg	kg
6.0m					3660* 3660* 7332
4.5m			5530* 5160	5230* 5220	3630* 3540 3270 8011
3.0m	11850*	11850*	8140* 7480	6420* 4930	3750* 3540 2990 8367
1.5m		9960*	6990	7080 4690	4020* 3430 2880 8444
0m	6310*	6310*	10710	6710 4520	4370 3340 2930 8249
- 1.5m	10480*	10480*	10600	6620 4440	4730 3300 3160 7760
- 3.0m	15210*	12680	10630*	6660 4460	5590 3300 3720 6916
- 4.5m	12430*	12430*	8850*	6850	6850* 5130 5552

Lift capacity front and rear.

Notes: 1. For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.  
 2. Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked\* are based on hydraulic capacity.

3. Lift capacities assume that the machine is on firm, level ground.  
 4. Lift capacities may be limited by local regulations. Please refer to your dealer.

Lift capacity full circle.

## LIFT CAPACITIES – DIPPER LENGTH: 1.9M, MONOBOOM 5.7M, TRACKSHOES: 700MM, NO BUCKET.

JS220 LC MONO

Reach	3m	4.5m	6m	7.5m	Capacity at Max Reach
Load Point Ht.	kg	kg	kg	kg	kg
6.0m			6230*	5740	6270* 5460 6191
4.5m		7840*	7840*	6580* 5630	6300* 4470 6983
3.0m		9720*	8140	7340* 5430	6050 4030 7390
1.5m			8060* 5250		5860 3890 7477
0m		11430*	7660	7980 5150	6070 4010 7255
- 1.5m		11000*	7680	7970 5140	6820 4470 6693
- 3.0m	12870*	12870*	9660*	7810	7410* 5650 5690

## LIFT CAPACITIES – DIPPER LENGTH: 2.4M, MONOBOOM 5.7M, TRACKSHOES: 700MM, NO BUCKET.

JS220 LC MONO

Reach	3m	4.5m	6m	7.5m	Capacity at Max Reach
Load Point Ht.	kg	kg	kg	kg	kg
6.0m			5630*	5630*	5290* 4790 6755
4.5m		7130*	7130*	6110* 5670	5210* 4030 7486
3.0m		9020*	8240	6940* 5450	5350* 3660 7868
1.5m		10630*	7810	7770* 5240	5340 3540 7949
0m		11320*	7620	7940 5110	5500 3630 7741
- 1.5m	10630*	10630*	11170* 7590	7890 5070	6060 3980 7218
- 3.0m	14070*	14070*	10190* 7680	7490* 5140	6950* 4830 6300
- 4.5m	10600*	10600*	7520* 7520*		6390* 6390* 4760

## LIFT CAPACITIES – DIPPER LENGTH: 3.0M, MONOBOOM 5.7M, TRACKSHOES: 700MM, NO BUCKET.

JS220 LC MONO

Reach	3m	4.5m	6m	7.5m	Capacity at Max Reach	
Load Point Ht.	kg	kg	kg	kg	kg	
6.0m					3660* 3660* 7332	
4.5m			5530*	5530* 5230*	3630* 3630 8011	
3.0m	11850*	11850*	8140* 9960*	8140* 7870	5620* 3940 3750* 3330 8367	
1.5m			6420* 7350*	5240 5800	3830 4020* 3220 8444	
0m	6310*	6310*	11020*	7580	5700 3730 4500* 3280 8249	
- 1.5m	10480*	10480*	11220*	7490	4990 5660 3700 5370* 3540 7760	
- 3.0m	15210*	14650	10630*	7530	7840 5010 6400 4160 6916	
- 4.5m	12430*	12430*	8850*	7720		6850* 5750 5552

Lift capacity front and rear.

Notes: 1. For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.

2. Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked\* are based on hydraulic capacity.

3. Lift capacities assume that the machine is on firm, level ground.

4. Lift capacities may be limited by local regulations. Please refer to your dealer.

Lift capacity full circle.

**LIFT CAPACITIES – DIPPER LENGTH: 1.9M, T.A. BOOM 5.7M, TRACKSHOES: 500MM, NO BUCKET.****JS220 NLC T.A.B.**

Reach	3m	4.5m	6m	7.5m	Capacity at Max Reach					
Load Point Ht.	kg	kg	kg	kg	kg					
7.5m					6350*					
6.0m		7250*	7250*		5890					
4.5m	11970*	11970*	8350*	7170	7030*	4690	5960*	4080	6565	
3.0m			9980*	6630	7320	4480		5800	3590	6998
1.5m			10920	6210	7090	4280		5570	3420	7089
0m			10710	6030	6940	4150		5760	3500	6855
- 1.5m	13950*	11140	10660*	6020	6920	4130		6530	3920	6256
- 3.0m			8840*	6160				7590*	5130	5167

**LIFT CAPACITIES – DIPPER LENGTH: 2.4M, T.A. BOOM 5.7M, TRACKSHOES: 500MM, NO BUCKET.****JS220 NLC T.A.B.**

Reach	3m	4.5m	6m	7.5m	Capacity at Max Reach						
Load Point Ht.	kg	kg	kg	kg	kg						
7.5m					5300*						
6.0m		6580*	6580*	6250*	4890						
4.5m	10330*	10330*	7710*	7320	6600*	4760	4850*	3610	7160		
3.0m			9400*	6780	7320*	4540	5250	3270	5040*	3230	7558
1.5m			10830*	6310	7130	4310	5150	3170	5010	3090	7643
0m	6700*	6700*	10740	6060	6950	4160			5140	3140	7426
- 1.5m	13480*	11020	10660	6000	6880	4090			5690	3450	6879
- 3.0m	13060*	11200	9630*	6070					7040*	4250	5907

**LIFT CAPACITIES – DIPPER LENGTH: 3.0M, T.A. BOOM 5.7M, TRACKSHOES: 500MM, NO BUCKET.****JS220 NLC T.A.B.**

Reach	3m	4.5m	6m	7.5m	Capacity at Max Reach						
Load Point Ht.	kg	kg	kg	kg	kg						
7.5m					3530*						
6.0m			5440*	5010	3320*						
4.5m		6870*	6870*	6070*	4860	4120*	3420	3300*	3270	7694	
3.0m	13270*	12630	8620*	6960	6860*	4610	5310	3320	3430*	2960	8065
1.5m	6990*	6990*	10290*	6430	7180	4360	5170	3190	3710*	2830	8145
0m	8570*	8570*	10790	6090	6960	4160	5060	3090	4220*	2860	7942
- 1.5m	12600*	10880	10620	5950	6840	4060			5070	3080	7433
- 3.0m	14500*	11000	10290*	5970	6850	4070			6070	3650	6545
- 4.5m			7870*	6150					6750*	5230	5082

Lift capacity front and rear.

Notes: 1. For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.

2. Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked\* are based on hydraulic capacity.

3. Lift capacities assume that the machine is on firm, level ground.

4. Lift capacities may be limited by local regulations. Please refer to your dealer.

Lift capacity full circle.

## LIFT CAPACITIES – DIPPER LENGTH: 1.9M, T.A. BOOM 5.7M, TRACKSHOES: 600MM, NO BUCKET.

JS220 SC T.A.B.

Reach	3m	4.5m	6m	7.5m	Capacity at Max Reach
Load Point Ht.	kg	kg	kg	kg	kg
7.5m					6350*
6.0m		7250*	7250*		5890*
4.5m	11970*	11970*	8350*	7980	5190
3.0m			9980*	7420	4980
1.5m			11060	6990	7180
0m			10850	6800	7040
- 1.5m	13950*	12840	10660*	6790	7010
- 3.0m			8840*	6930	

## LIFT CAPACITIES – DIPPER LENGTH: 2.4M, T.A. BOOM 5.7M, TRACKSHOES: 600MM, NO BUCKET.

JS220 SC T.A.B.

Reach	3m	4.5m	6m	7.5m	Capacity at Max Reach
Load Point Ht.	kg	kg	kg	kg	kg
7.5m					5300*
6.0m		6580*	6580*	6250*	5390
4.5m	10330*	10330*	7710*	7710*	5260
3.0m			9400*	7580	7320*
1.5m			10830*	7090	7220
0m	6700*	6700*	10890	6830	7040
- 1.5m	13480*	12720	10810	6760	6970
- 3.0m	13060*	12920	9630*	6840	

## LIFT CAPACITIES – DIPPER LENGTH: 3.0M, T.A. BOOM 5.7M, TRACKSHOES: 600MM, NO BUCKET.

JS220 SC T.A.B.

Reach	3m	4.5m	6m	7.5m	Capacity at Max Reach
Load Point Ht.	kg	kg	kg	kg	kg
7.5m					3530*
6.0m			5440*	5440*	3320*
4.5m		6870*	6870*	6070*	5360
3.0m	13270*	13270*	8620*	7760	6860*
1.5m	6990*	6990*	10290*	7210	7280
0m	8570*	8570*	10930	6860	7050
- 1.5m	12600*	12570	10760	6720	6940
- 3.0m	14500*	12710	10290*	6740	6950
- 4.5m			7870*	6930	

Lift capacity front and rear.

Notes: 1. For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.

2. Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked\* are based on hydraulic capacity.

3. Lift capacities assume that the machine is on firm, level ground.

4. Lift capacities may be limited by local regulations. Please refer to your dealer.

Lift capacity full circle.

## LIFT CAPACITIES – DIPPER LENGTH: 1.9M, T.A. BOOM 5.7M, TRACKSHOES: 700MM, NO BUCKET.

JS220 LC T.A.B.

Reach	3m		4.5m		6m		7.5m		Capacity at Max Reach		
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
7.5m									6350*	6350*	4193
6.0m			7250*	7250*					5890*	5890*	5715
4.5m	11970*	11970*	8350*	8350*	7030*	5750			5960*	5000	6565
3.0m			9980*	8310	7650*	5530			6360*	4430	6998
1.5m			11160*	7860	8210	5320			6410	4240	7089
0m			11340*	7670	8060	5190			6650	4350	6855
- 1.5m	13950*	13950*	10660*	7660	7960*	5170			7550	4900	6256
- 3.0m			8840*	7800					7590*	6440	5167

## LIFT CAPACITIES – DIPPER LENGTH: 2.4M, T.A. BOOM 5.7M, TRACKSHOES: 700MM, NO BUCKET.

JS220 LC T.A.B.

Reach	3m		4.5m		6m		7.5m		Capacity at Max Reach		
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
7.5m									5300*	5300*	5080
6.0m			6580*	6580*	6250*	5950			4890*	4890*	6391
4.5m	10330*	10330*	7710*	7710*	6600*	5820			4850*	4420	7160
3.0m			9400*	8470	7320*	5590	5520*	4030	5040*	3980	7558
1.5m			10830*	7970	8020*	5360	5920	3930	5490*	3820	7643
0m	6700*	6700*	11360*	7700	8060	5190			5920	3910	7426
- 1.5m	13480*	13480*	11000*	7630	7990	5130			6570	4290	6879
- 3.0m	13060*	13060*	9630*	7710					7040*	5310	5907

## LIFT CAPACITIES – DIPPER LENGTH: 3.0M, T.A. BOOM 5.7M, TRACKSHOES: 700MM, NO BUCKET.

JS220 LC T.A.B.

Reach	3m		4.5m		6m		7.5m		Capacity at Max Reach		
Load Point Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm
7.5m									3530*	3530*	5811
6.0m					5440*	5440*			3320*	3320*	6984
4.5m			6870*	6870*	6070*	5920	4120*	4120*	3300*	3300*	7694
3.0m	13270*	13270*	8620*	8620*	6860*	5670	5780*	4080	3430*	3430*	8065
1.5m	6990*	6990*	10290*	8090	7680*	5400	5940	3950	3710*	3500	8145
0m	8570*	8570*	11190*	7740	8080	5200	5830	3840	4220*	3550	7942
- 1.5m	12600*	12600*	11200*	7590	7950	5090			5160*	3840	7433
- 3.0m	14500*	14500*	10290*	7610	7600*	5100			6730*	4560	6545
- 4.5m			7870*	7800					6750*	6580	5082

 Lift capacity front and rear.

Notes: 1. For lifting capacity including bucket, subtract total weight of bucket or bucket and quickhitch from above values.

2. Lifting capacities are based on ISO 10567, that is: 75% of minimum tipping load or 87% of hydraulic lift capacity, whichever is the less. Lifting capacities marked\* are based on hydraulic capacity.

3. Lift capacities assume that the machine is on firm, level ground.

4. Lift capacities may be limited by local regulations. Please refer to your dealer.

 Lift capacity full circle.



**ONE COMPANY, OVER 300 MACHINES.**

Your nearest JCB dealer

### Hydraulic Excavator JS200/210/220/NLC/SC/LC

Engine power: 129kW (173hp) Bucket capacity: 0.4 – 1.19m<sup>3</sup> Operating weight: 19618 – 22490kg

JCB Sales Limited, Rocester, Staffordshire, United Kingdom ST14 5JP.

Tel: +44 (0)1889 590312 Email: [salesinfo@jcb.com](mailto:salesinfo@jcb.com)

Download the very latest information on this product range at: [www.jcb.com](http://www.jcb.com)

©2009 JCB Sales. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any other means, electronic, mechanical, photocopying or otherwise, without prior permission from JCB Sales. All references in this publication to operating weights, sizes, capacities and other performance measurements are provided for guidance only and may vary dependant upon the exact specification of machine. They should not therefore be relied upon in relation to suitability for a particular application. Guidance and advice should always be sought from your JCB Dealer. JCB reserves the right to change specifications without notice. Illustrations and specifications shown may include optional equipment and accessories. All images are correct at time of print. The JCB logo is a registered trademark of J C Bamford Excavators Ltd.



WORLD  
LAND  
TRUST™  
[www.carbonbalancedpaper.com](http://www.carbonbalancedpaper.com)  
unique print number



Mixed Sources  
Product contains well-managed  
forests and other controlled sources  
[www.fsc.org](http://www.fsc.org) Cert no. TLE-COC-002291  
© 1996 Forest Stewardship Council

