

Diesel Generator Set:P2250

Standard Features	
MODEL	P2250
Standby Power(50Hz)	1980KW/2475KVA
Prime Power(50Hz)	1800KW/2250KVA
Engine	PERKINS 4016-61TRG3
Alternator	LEROYSOMER LSA51.2VL90





- Standard control panel, Including controller, Operation lighting, Emergency stop button, Buzzer
- Main line circuit breaker
- Two 12V free maintenance battery, battery charger, Battery Ract and Battery Switch
- Industrial silencer, Ripple Flex exhaust pipe, Flange
- Fork lift position and lifting position
- With-6 hours Base Fuel Tank; Fuel Tank Capacity: 2000L
- Radiator 50°C max, Fans driven by Belt, with safety Guard
- Hand pump special for take out dirty oil

	
Open Type	Silent Type

Generator Set Ratings						
Voltage	Frequency	Phase	P.F (COS ϕ)	Prime Current Amps	Standby Power (KW/KVA)	Prime Power (KW/KVA)
440/254	50	3	0.8	2955	1980/2475	1800/2250
415/240	50	3	0.8	3130	1980/2475	1800/2250
400/230	50	3	0.8	3249	1980/2475	1800/2250
380/220	50	3	0.8	3422	1980/2475	1800/2250

Prime Power(PRP):Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820-97(eqvISO8528);10% overload capability is available for a period of 1 hour within a 12-hour period of operation. Standby Power Rating (STP):The standby power rating is applicable for supplying emergency

Dimension & Weight Of Generator Set	
Dimension(L*W*H)/CM For Open Type	560×220×255
Net Weight/KG For Open Type	12000KGS
Dimension(L*W*H)/CM For Silent Type	40HQ
Net Weight/KG For Silent Type	19800KGS
Dimension (L*W*H)/MM For Trailer Type	
Net Weight/KG For Trailer Type	

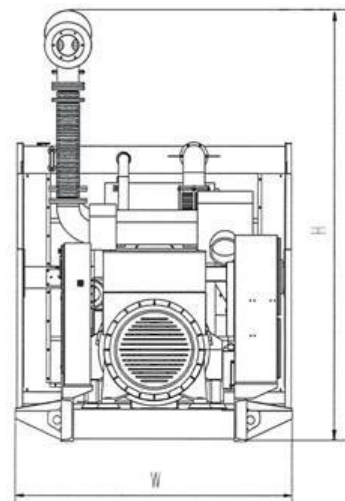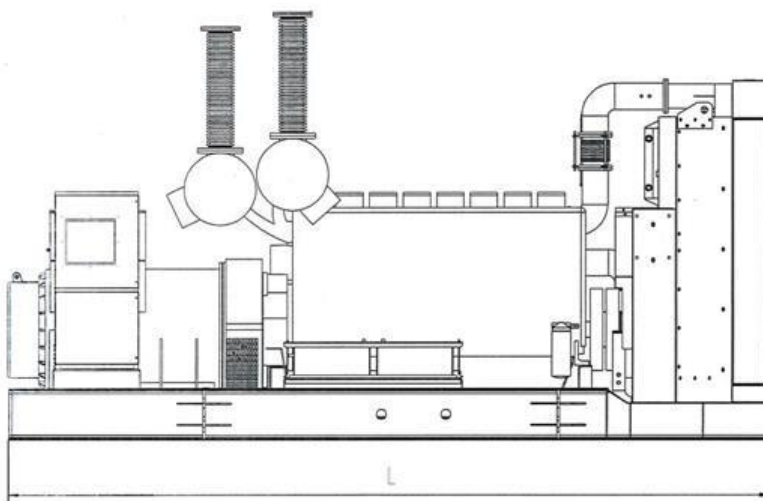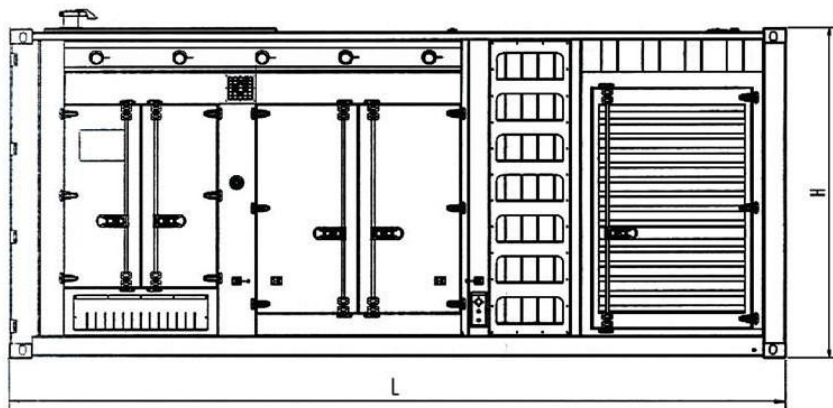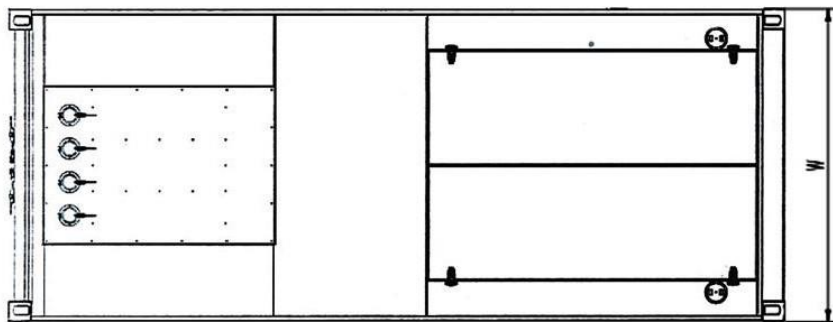

Specification of Engine		
Basic Specific ation	Engine Model	4016-61TRG3
	Manufacturer	PERKINS Company
	Prime Power	1876KW/2647HP
	Standby Power	2083KW/2513HP
	Engine Configuration	16Cylinder 60° Vee Form, 4Stroke, Direct Injection
	Gas Feeding Model	Turbocharged, Air to Air
	Bore × Stroke	160 × 190(MM)
	Displacement	61.123L
	Rated Speed	1500RPM
	Speed Governor	Electric Governor
	Starter Model	12V DC Start
	Cooling System	Water Cool
	Compression Ratio	13.6:1
Exhaust System	Exhaust Gas Flow	490m ³ /min
	Exhaust Temperature	560°C
	Max Back Pressure	4kPa
Air Intake System	Max Intake Restriction	3.71kPa
	Burning Capacity	175m ³ /min
	Air Flow	2500m ³ /min
Fuel System	Fuel Consumption (Prime Power 100%) Load	205g/Kw.h
	Fuel Consumption (Prime Power 75%) Load	200g/Kw.h
	Fuel Tank Capacity	2000L
Lubricat ion System	Oil Capacity	213L
	Oil Consumption	0.52g/KW.H
	Oil Pressure at Rated RPM	340kPa
Cooling System	Total Coolant Capacity	350L
	Thermostat Open Temperature	71-85°C
	Max Coolant Temperature	98°C

Specification of Alternator		
Basic Specification	Alternator Model	LSA51.2VL90
	Manufacturer	LEROYSOMER company
	Prime Output	1888KW/2360KVA
	Standby Output	2077KW/2596KVA
	Excitation Model	Brushless, Self-Exciting
	Cooling Method	Air Cooling
	Connection Type	3 Phase and 12 Wires "Star" Connection
	Power Factor	0.8
	Protection Class	IP23
	Insulation Class	H
	Altitude	≤1000m
	Voltage Regulation, Steady State	≤ ±1%
	Telephone Influence Factor	<50
	Sudden Voltage Warp (100% Sudden Reduce)	≤ ±1%
	Sudden Voltage Warp (Sudden Increase)	≤ ±25%
	Voltage Stable Time (100% Sudden Reduce)	≤6S
	Voltage Stable Time (Sudden Increase)	≤6S
	Frequency Reduce	0-5% adjustable
	Frequency Regulation, Stead State	≤1.5%
	Frequency Waving	≤0.8%
	Sudden Frequency Warp (100% Sudden Reduce)	≤+12%
	Sudden Frequency Warp (100% Sudden Increase)	≤-10%
	Frequency Recovery Time (100% Sudden Reduce)	≤5S
	Frequency Recovery Time (Sudden Increase)	≤5S
Compliance GB755,BS5000,VDE0530,NEMAMG1-22,IED34-1,CSA22.2 and AS1359 Stands		

Control Panel System	
1.SINGLE SET GEN-SET CONTROLLER	
SUM : They meet all possible requirements for AMF applications,including modem control,user configuration and full gen-set monitoring and protection. AMF models enable the combination of manual and remote start application with auto mains fail function.	
KEY FEATURES:	
1. High water Temperature Shutdown	
2. Low Oil Pressure Shutdown	
3. Over Speed Shutdown	
4. Over Crank Shutdown	
5. Function as Emergent Stop	
6. Heated Display Option	
7. Breaker Control Buttons on Front Fascia	
8. Alternative Configuration (50Hz/60Hz)	
9.Support ATS Function	b.ComAp AMF 20
KEY FEATURES:	
1. High Water Temperature Shutdown	
2. Low Oil Pressure Shutdown	
3. Over Speed Shutdown	
4. Over Crank Shutdown	
5. Function as Emergent Stop	
6. With Remote Teleport Communication RS 485	
7. Heated Display Option.	
8. Alternative Configuration (50HZ/60HZ)	c.DSE 7320
9. Support ATS Function	
10. Remote Communications (RS232 & RS485)	
11. Fuel Usage Monitor And Low Level Alarms.	
12. Engine Specific J1939 for All Major Manufacturers	
13. Configurable Display Languages.	
14. Load Switching, Load Shedding&Dummy Load Outputs.	
15. Alternative Configuration (50Hz/60Hz)	d.ComAp AMF 25

2.Multiple paralleling gen-sets with internal load-sharing controller

SUM: Functionality, optimized for ease of use, installation and configuration, includes built-in synchronization and digital isochronous active and reactive load sharer. Native co-operation of up to 32 gen-sets is a standard feature.


KEY FEATURES:

1. The Most up to 32-set Synchronization	
2. Wide Range of Communication Interfaces - RS232, RS485, USB, Modbus, GSM/Analog Modem, GPRS, Ethernet	
3. Direct Governor & AVR Control	
4. kW & kV Ar Load Sharing	
5. Advanced Power Management Function	
Load Dependent Start/Stop	
Load Demand Swap	
Running Hours Equalization	
6. Support of Electronic Controlled Engines (J1939, Modbus)	b.ComAp IC-NT NINT

3.SINGLE GEN-SET IN PARALLEL TO MAINS CONTROLLER

SUM: They are integrated controllers combining AMF and paralleling functions for single gen-sets. This combination allows the gen-set with interrupt-free transfers as well as in continuous parallel-to -mains mode.

KEY FEATURES:

1. Mains (Utility) Failure Detection, Mains (Utility) Power Monitoring (kW, kV Ar, kV A & pf) Monitoring, Mains (Utility) Decoupling Protection, Mains (utility) kW Export Protection.	
2. Remote Communications (RS232, RS485 x2, Ethernet)	
3. High Tariff Avoidance, Peak Shaving, Peak Lopping	
4. Synchronization of MCB (Reverse Synchronization)	
5. Support of Electronic Controlled Engines (J1939, Modbus)	
6. Wide Range of Communication Interfaces - RS232, RS485, USB, Modbus, GSM/Analog Modem, GPRS,	b.ComAp IC-NT SPTM

Ethernet			
Generator Set Options and Accessories			
Generator Set Design		Control System	
Open Type	☐	AMF(Automatic Management Function)	☐
Silent Type	☐	ATS(Automatic Transfer System)	☐
Super Silent Type	☐	ASS(Automatics Synchronization System)	☐
Trailer Type	☐	Remote Control Puma	☐
Fuel System		Alternator	
12 Hour Base Tank(single wall)	☐	PMG(EBS) Excitation	☐
24 Hour Base Tank(single wall)	☐	Space Heater	☐
Dual Wall Base Fuel Tank	☐	Preheater System	
Outside Fuel Tank	☐	Coolant Preheater	☐
Automatic Refueling Compensation System	☐	Oil Preheater	☐
Exhaust System		Battery Preheater	☐
Residential Exhaust Silencer	☐		
Circuit Breaker Brand			
CHNT	☐		
ABB	☐		