

JD9 Engine

205 – 343 kW (275 – 460 hp)



JOHN DEERE

Powerful integration

Built on a solid foundation.

The new JD9 engine expands on the proven performance of the existing John Deere PSS 9.0L engine, offering uncompromising reliability and power while streamlining complexity and installation costs.

More power.

The JD9 expands our 9.0L lineup by stretching the maximum power output up to 343 kW (460 hp) and peak torque up to 1883 Nm (1389 lb-ft).

Value choices.


Single- and dual-turbo configurations provide users with versatility to meet specific needs. The new single-turbo option improves integration and packaging for a cost-effective power solution.

Enhanced reliability.

The engine's simplified in-line aftertreatment system reduces connection points and streamlines integration. By eliminating and reducing various ATD sensors and parts, the JD9 provides greater reliability. Model-based controls also allow for improved fuel consumption and transient response.

Connected uptime.

The JD9 engine comes equipped with John Deere Connected Support™ technology. There are no subscription fees or ongoing expenses. With your approval, this proactive monitoring system allows technicians to remotely diagnose issues to help keep your machines running strong.

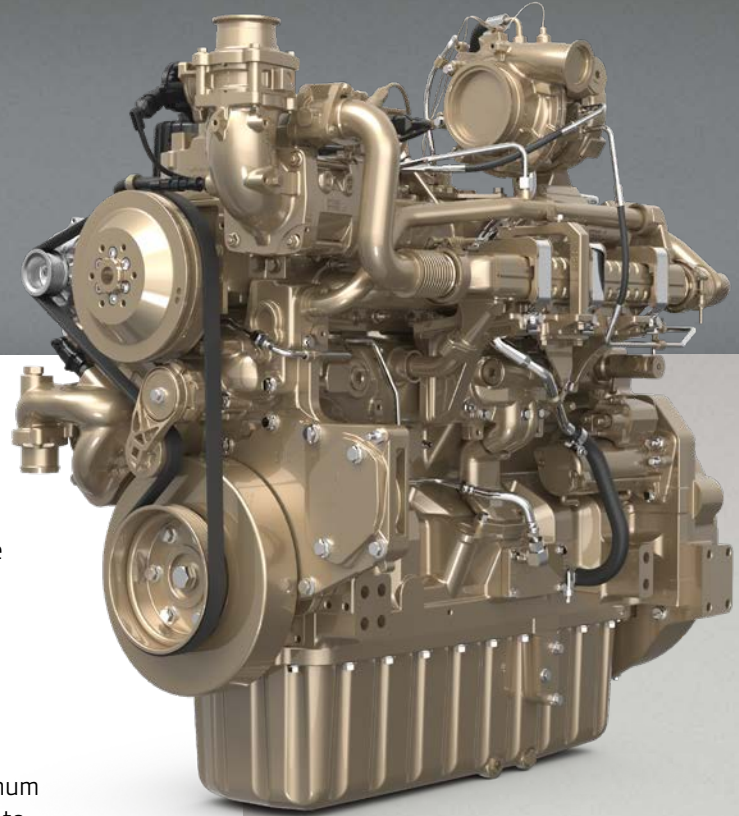

Simplified aftertreatment.

The JD9 is compliant with U.S. EPA Final Tier 4, CARB, and EU Stage V emissions regulations. It features a durable in-line aftertreatment system with fewer connection points than the previous generation for ease of application integration.



	JD9P	JD9X
Engine model	6090HI550	6090CI551
General data		
Type	6-cylinder, In-line, 4-stroke diesel, Water-cooled	
Displacement	9.0L	
Fuel system	Electronic high-pressure common-rail (HPCR)	
Cylinder head	4-valve	
Aspiration	Turbocharged, Air-to-air aftercooled	
Turbocharger	VGT	Series
Performance		
Rated power	205 – 280 kW (275 – 375 hp) @ 2000 rpm	280 – 343 kW (375 – 460 hp) @ 2000 rpm
Peak torque	1600 Nm (1180 lb-ft) @ 1600 rpm	1883 Nm (1389 lb-ft) @ 1600 rpm
Low idle	800 rpm	
Off-level capability	35° Continuous/45° Intermittent	
Service interval	Up to 500 hours	
Emissions technology		
Certification	EPA Final Tier 4/EU Stage V	
EGR	External cooled exhaust gas recirculation (EGR)	
Aftertreatment	In-line DOC/DPF/SCR - Size 4	In-line DOC/DPF/SCR - Size 5
Specifications		
Dimensions (L* x W x H)	1282 x 795 x 1208 mm (50 x 31 x 48 in)	1315 x 763 x 1194 mm (52 x 30 x 47 in)
Weight	1468 kg (3237 lb)	1521 kg (3353 lb)

Preliminary information. *Engine length without fan drive.
Specifications are subject to change. Dimensions may vary based on options selected.

This literature has been compiled for worldwide circulation. While general information, pictures and descriptions are provided, some illustrations and text may include finance, credit, insurance, product options and accessories NOT AVAILABLE in all regions. PLEASE CONTACT YOUR LOCAL AUTHORIZED JOHN DEERE DEALER OR DISTRIBUTOR FOR DETAILS. John Deere reserves the right to change specification, design and price of the products described in this literature without notice. John Deere's green and yellow color schemes, the leaping deer symbol, and JOHN DEERE are trademarks of Deere & Company. All Worldwide Rights Reserved. THIS MATERIAL IS THE PROPERTY OF DEERE & COMPANY. ALL USE, ALTERATIONS AND/OR REPRODUCTION NOT SPECIFICALLY AUTHORIZED BY DEERE & COMPANY IS PROHIBITED

DSWT171 (24-06)



JOHN DEERE

JohnDeere.com/JDPower